


Dual Bead Shield® Super Sealing Clamps- SAE Type "F"

Available exclusively from Murray Corporation, our Dual Bead Shield® Super Sealing Clamp is precision-engineered for various applications.

The inner Dual Bead Shield® provides superb sealing characteristics and is safe for all soft hoses.

This product is perfect for use in air and coolant systems, and is also found in the marine, agriculture, construction and off-road markets.

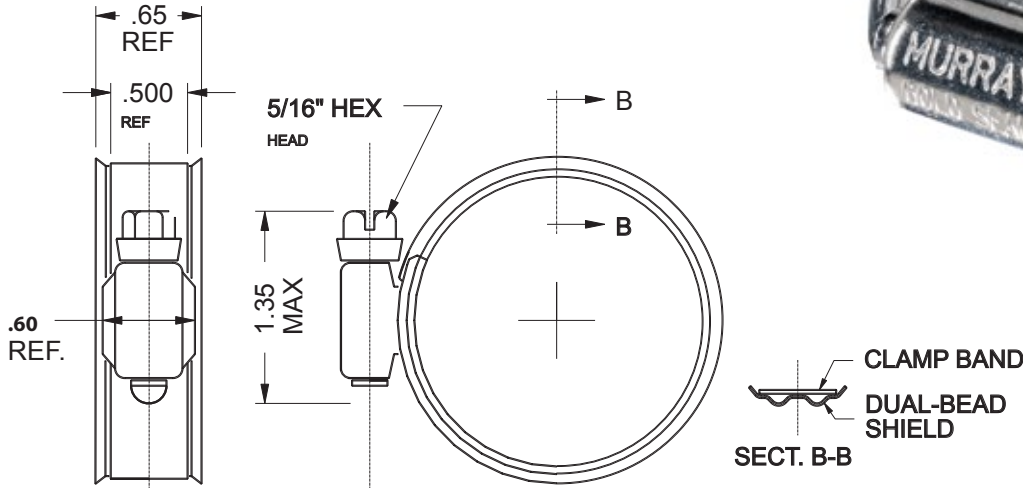

Rated Ultimate Torque:
 Carbon Screw 50in.lbs. min. (5.6Nm)
 SS Screw 60in.lbs. min. (6.8Nm)
Recommended Installation Torque:
 Carbon Screw 30-40in.lbs. (3.4 - 4.5Nm)
 SS Screw 35-45in.lbs. (4.0 - 5.1Nm)

Plated Screws	Part Number		"A" Diameter Range					
	"400" Series Stainless Screws	"300" Series Stainless Screws	Decimals		Inches		Millimeters	
			Min.	Max.	Min.	Max.	Min.	Max.
DB 16	DB 16SS	DB 16SS305	0.63	1.38	5/8	1-3/8	15.9	34.9
DB 20	DB 20SS	DB 20SS305	0.69	1.63	11/16	1-5/8	17.5	41.4
DB 24	DB 24SS	DB 24SS305	0.94	1.88	15/16	1-7/8	23.8	47.6
DB 28	DB 28SS	DB 28SS305	1.19	2.13	1-3/16	2-1/8	30.2	54.0
DB 32	DB 32SS	DB 32SS305	1.44	2.38	1-7/16	2-3/8	36.5	60.3
DB 36	DB 36SS	DB 36SS305	1.69	2.63	1-11/16	2-5/8	42.9	66.7
DB 40	DB 40SS	DB 40SS305	1.94	2.88	1-15/16	2-7/8	49.2	73.0
DB 44	DB 44SS	DB 44SS305	2.19	3.13	2-3/16	3-1/8	55.6	79.4
DB 48	DB 48SS	DB 48SS305	2.44	3.38	2-7/16	3-3/8	61.9	85.7
DB 52	DB 52SS	DB 52SS305	2.69	3.63	2-11/16	3-5/8	68.3	92.1
DB 56	DB 56SS	DB 56SS305	2.94	3.88	2-15/16	3-7/8	74.6	98.4
DB 60	DB 60SS	DB 60SS305	3.19	4.13	3-3/16	4-1/8	1.0	104.8
DB 64	DB 64SS	DB 64SS305	3.44	4.38	3-7/16	4-3/8	87.3	111.1
DB 72	DB 72SS	DB 72SS305	3.94	4.88	3-15/16	4-7/8	100.0	123.8
DB 80*	DB 80SS	DB 80SS305	4.44	5.38	4-7/16	5-3/8	112.7	136.5
DB 88*	DB 88SS	DB 88SS305	4.94	5.88	4-15/16	5-7/8	125.4	149.2
DB 96	DB 96SS	DB 96SS305	5.44	6.38	5-7/16	6-3/8	138.1	161.9
DB 104	DB 104SS	DB 104SS305	5.94	6.88	5-15/16	6-7/8	150.8	174.7
DB 116	DB 116SS	DB 116SS305	6.38	7.63	6-3/8	7-5/8	161.9	193.7

Other sizes available upon request. Available in packed and bulk stock. Other packaging configurations available.
 *items not stocked. special order only